

# User Instructions

Motorized Freestanding pergola

Size: 300x300cm 300x400cm 400x400cm

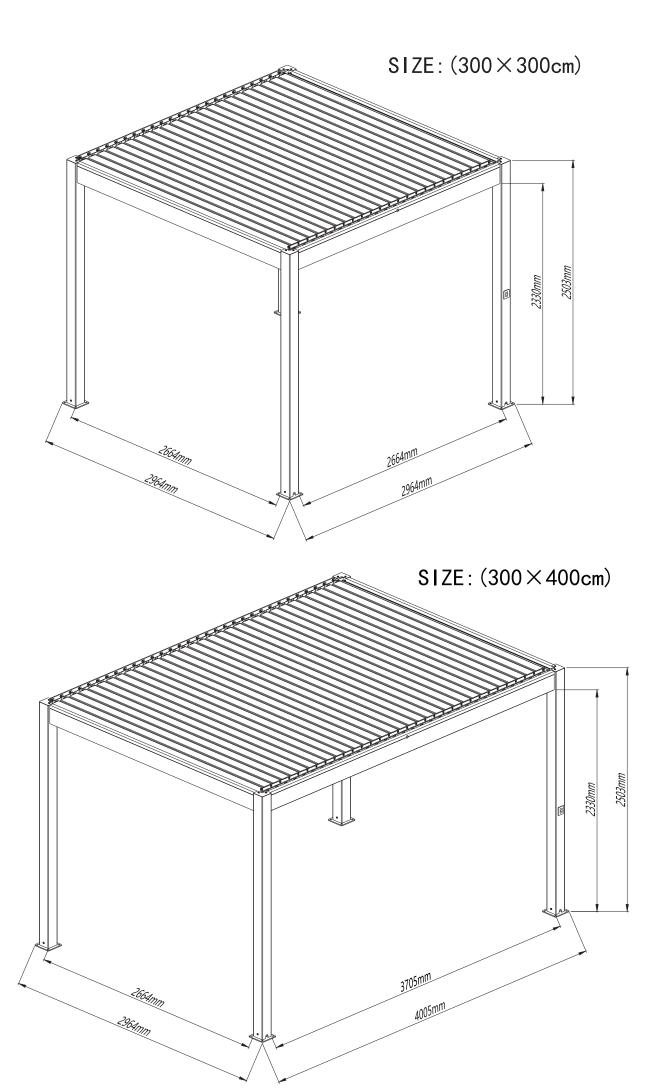

SIZE:  $(400 \times 400 \text{cm})$ 

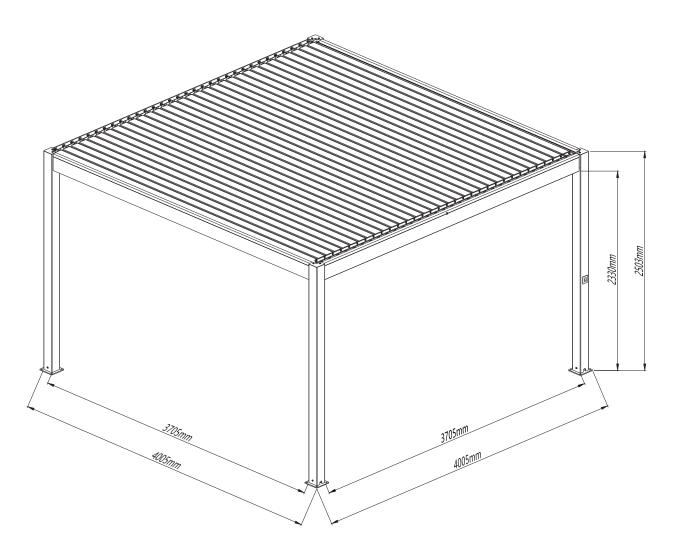

#### Content

Tools and man force 2	
Part List · · · · · · · 3-4	<b>'</b> +
Product Description 5	
Safety Instruction · · · · · 5-6	5
Mounting · · · · · · · 7-1	19
Motor Setup · · · · · 20	
Dismounting · · · · · 21	
Storage · · · · · · 21	
Disposal · · · · · · · · 21	

### **Attention:**

Read this instruction manual carefully and completely before mounting and usage. Keep this manual for future reference.

#### Dear Customer,

Congratulations and thank you for choosing to buy the Pergola from our company. To enjoy this product for a long time and for your own and the safety of other people, please follow the assembly instructions.

Before you start the assembly process and then using the Pergola, we suggest you are best to get familiar with this product first. Make sure all parts listed up in below packing lists are delivered and intact. If you find that there are parts missing or damaged please do not instal the pergola but contact us immediately. Do not start the assembly process if parts are missing or defective.

### **Tools and man force**


Recommended: 2 or 3 people

### Additional tools:

1. Ladder 2. M10 / 13 open wrench supplied 3. Rubber mallet

4. Tape measure 5. 5mm hexgon wrench supplied 6. Pencil

7. Spirit level 8. Electric drill

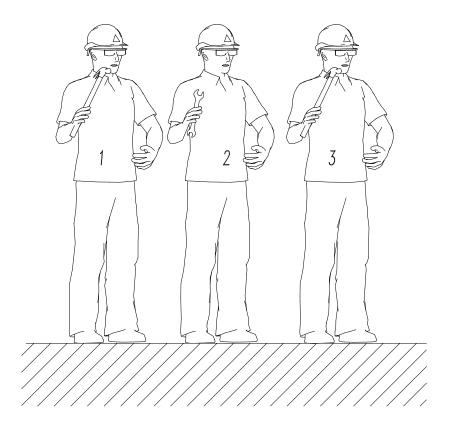

### **Parts List**

Please check all parts against the parts list before commencing construction of pergola.

#### **SIZE: 300X300CM /300X400CM PARTS LIST**

		Quantity	
Number Picture	Picture	3x3	3x4
1	000	×4	
2	9	×8	
3	( )	×4	
4			
5		×46	×64
6			
7		×4	

8		×8
9	0	×1
10	<b>3</b>	×16
15		×1
16		×2

#### HARDWARE AND OTHER PARTS:

- ① Base plate
- 2 M8X20 countersunk screw
- 3 Upright cover
- 4 M8X 22.4 Hexagon screw
- ⑤ Plastic spacer
- 6 Locking nut
- 7 Gutter connector
- 8 M8X 20 flat head screw
- 9 40-32 connector (using in the manual led type)
- 10 M8x100 expansion bolt
- 15 Motor
- 16 M10 screw cap

		Quantity		
Number	Picture		3x3	3x4 4x4
A	Ų	<u> </u>	×1	
B	کا	· · · · · · · · · · · · · · · · · · ·	×1	
<u>C</u>	2		×2	
<u>D1</u>	ار يا		×2	
<b>D2</b>		<b>△</b>	×2	
E	1 _		×2	
F	<u></u> 5		×2	
G	L		×21 ×30	
H			×1	
			×1	
J	7	<i></i>	×2	

### **ALMINUM PROFILE PARTS LIST:**

- A Beam with motor hole
- Beam with slots
- © Beam
- **D**−1 Post+post connector
- ①-2 Post +post connector

- © Gutter
- © Gutter
- © Common louver
- ① Driving louver
- ① Middle strengthen louver
- (J) Control rod

### **Product Description**

Make the most of your outdoor living area with your pergola. Relax and enjoy the outdoors while being protected from sun. The coated aluminum frame pergola is perfect for shading your garden, deck, courtyard and swimming pool.

### **Important Safety Instructions**

Warning: For the safety of you and other persons it is important to follow below instructions and obey warnings.

#### Symbol explanation



This warning triangle calls attention to hazards that that can lead to death or to severe injuries or which are important for the functioning of the Pergola.



This sign identifies important notes.

#### Safety instructions



#### To install this pergola technical knowledge is necessary.

Do not mount this pergola yourself but contact a professional workman for help if

- you are unsure if the pergola can be mounted on the place you chose for installation.
- you do not understand the instruction manual or parts ofit.
- you do not have necessary tools available.
- ♦ you do not have necessary technical knowledge.



#### A minimum ofthree healthy adults are required to move and install the pergola

as the product is big and heavy. Do not try to install the pergola alone. If the pergola falls, it could cause serious injuries and damages! Contact an authorized assembler for help.



Do not install the pergola when you find damage parts are that parts are missing.

Contact your dealer.



Keep children and pets out of the working area during assembly and adjustments.



This product and its fixing parts are only suitable for installation on a plain cement wall or stable brickwork, If the wall/brickwork shows cracks you have to consult a professional.



**Nobody is allowed to change the products' design and structure** without the permission of manufacture or authorized deputy.



Please make sure that your hands are clean at the time of the assembly; otherwise you may soil frame.



Nobody is allowed to climb onto the Pergola. Hanging anything on the Pergola is forbidden.

Sheeting was used to protect the paint. This must be removed afterwards.


This structure is a non-permanent structure and the warranty does not cover damage incurred under extreme weather conditions including heavy rain, high winds or if exposed to high heat from heaters or BBQs.

Safety precautions should always be followed when assembling and using this product to reduce the risk of personal injury and damage to equipment. Please read all instructions before assembly and use. Never leave children unattended around/under this pergola. Do not attempt to assemble or use the pergola in moderate or heavy wind conditions. Always **keep the pergola louver open** and secure it during heavy winds or extreme weather conditions to avoid damage to the pergola or personal injury.

## Mounting and usage


### STEP 1

Attach base plate  $\bigcirc 1$  X4 to the bottom of the post ( $\bigcirc 1$  X2 ,  $\bigcirc 2$  X2 )use bolt  $\bigcirc 2$  X8 to attach with hey key or electric drill.

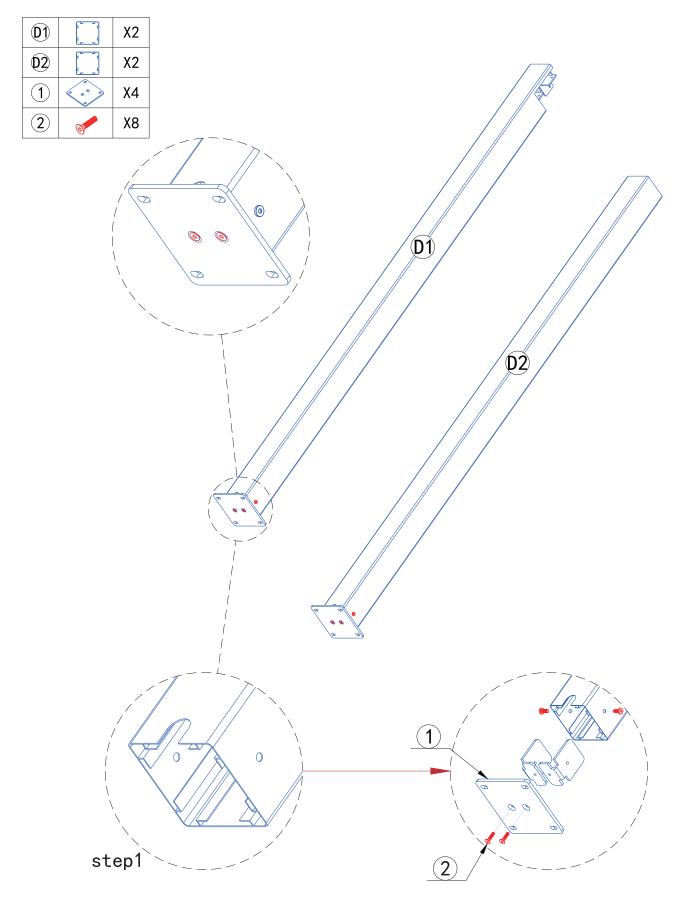


1. Loosen screws from post hardware on the post D1 、 D2 , attach Beam C to the D1 、 D2 , then use screws to fasten.



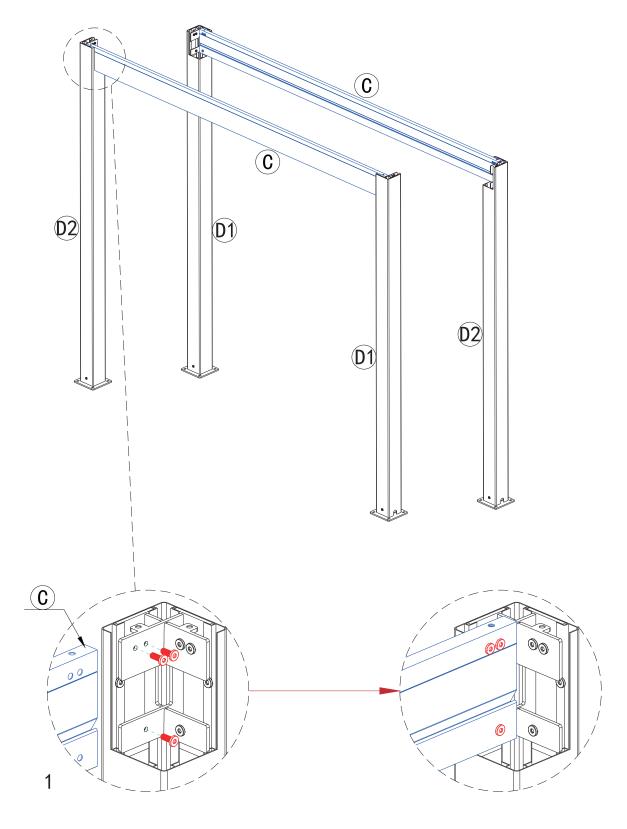


- 1.Loosen screws from post hardware on the post D1 、 D2 , attach Beam A and Beam B to the D1 、 D2 , then use screws to fasten.
- 2 .Attach upright cover 3 X 4 ,use 8 X8 to fasten the upper hole on the post .

A	X1
B	X1
3	Х4
8	Х8

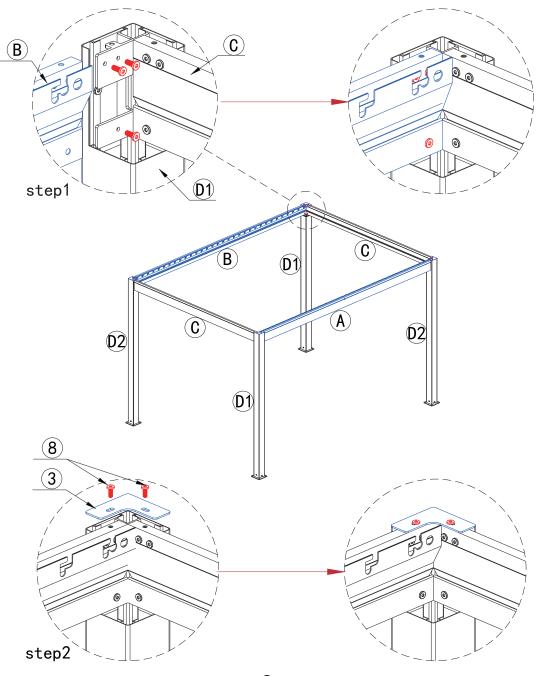


- 1.Fasten  $\bigcirc{7}$  gutter connector on the top of the  $\bigcirc{1}$  and  $\bigcirc{2}$  .
- 2.Attach E gutter by hooking inside Beam B and Beam A.Attach F gutter by hooking inside Beam C.

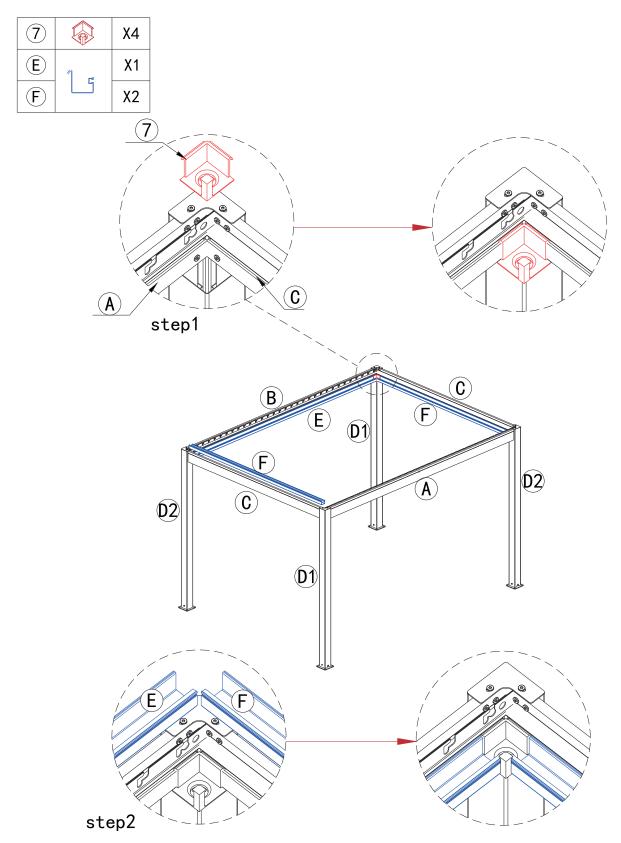


- 1.Place motor (15) into (E) as shown below. Attach (E) by hooking inside the beam (A).
- 2.Connect the holes in the (15) with (A).
- 3.Align(9)into(7) (The side close to the motor ).

9	0	X1
E		X1
15	2	X1

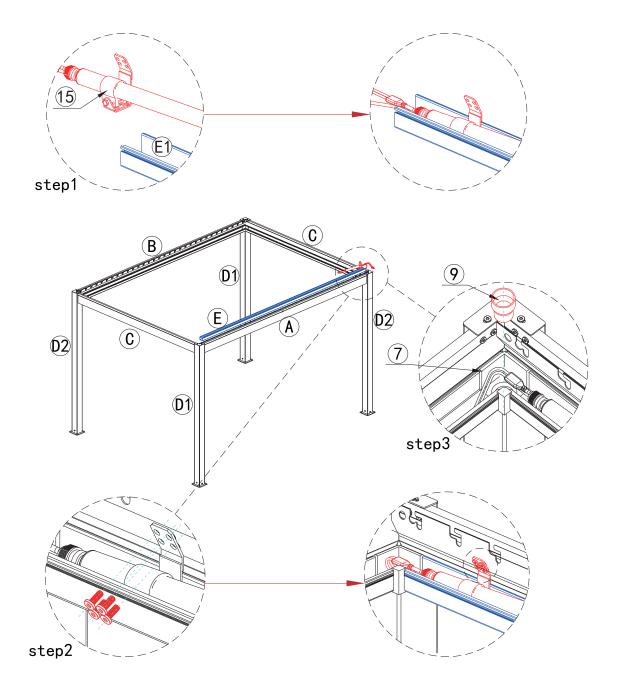


- 1. Measure the column spacing diagonal lines and adjust them with the Same spacing, then mark the ground on all four holes of (1).
- 2.Insert the bolt  $\widehat{10}$  .Use the hammer drill if necessary ,place the posts over the bolts, tighten the nuts.

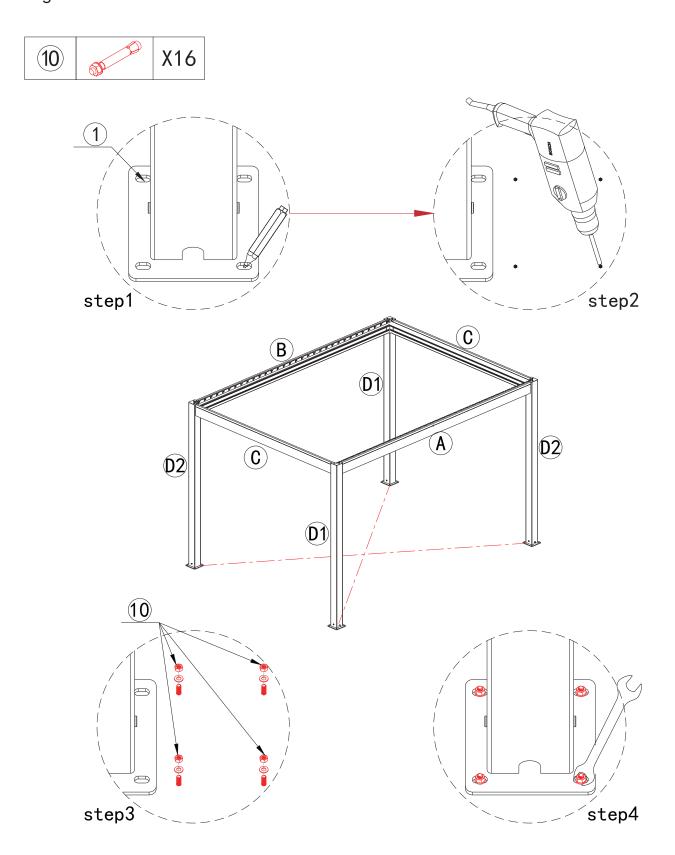


1.Use the glass glue gun to evenly apply the glass glue at the junction of B and C.


2.Use the glass glue gun to evenly apply the glass glue at the junction of A and C.



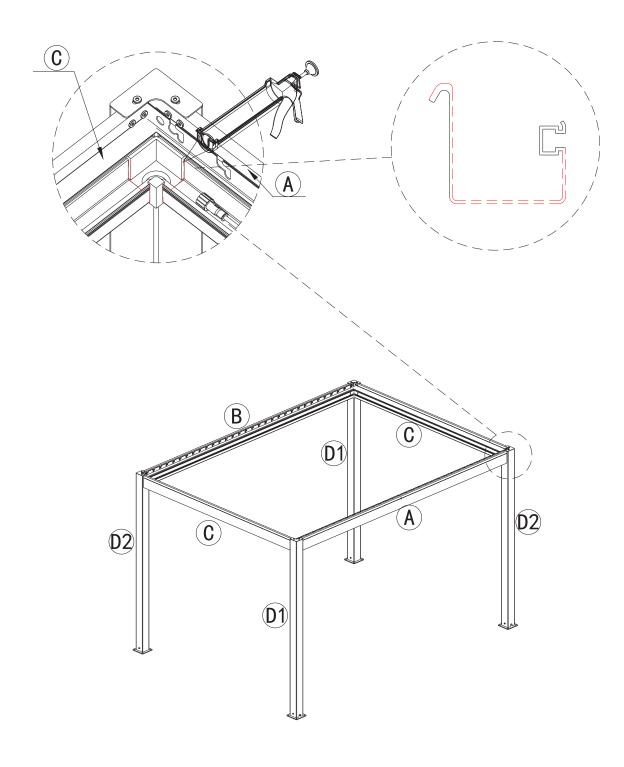



1.Connect the female and male plugs for the LED lighting( DC24V to DC24V ) and motor (DC24V to DV24V ) and plug the power cable into local socket.

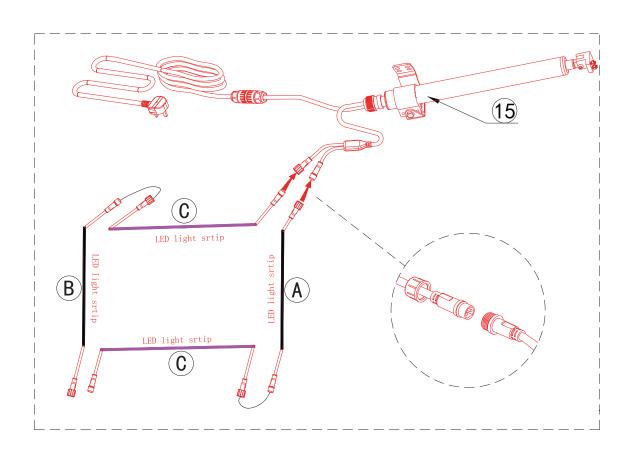

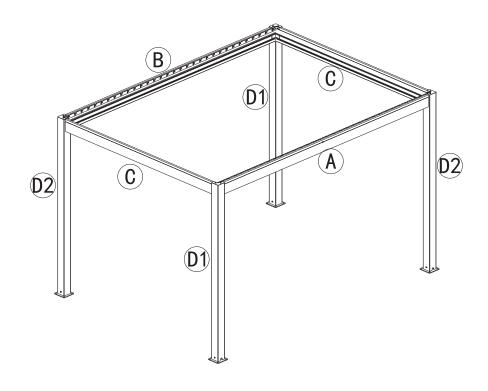


1. Place driving louver (H) into 8th slot on Beam (A) and (B).



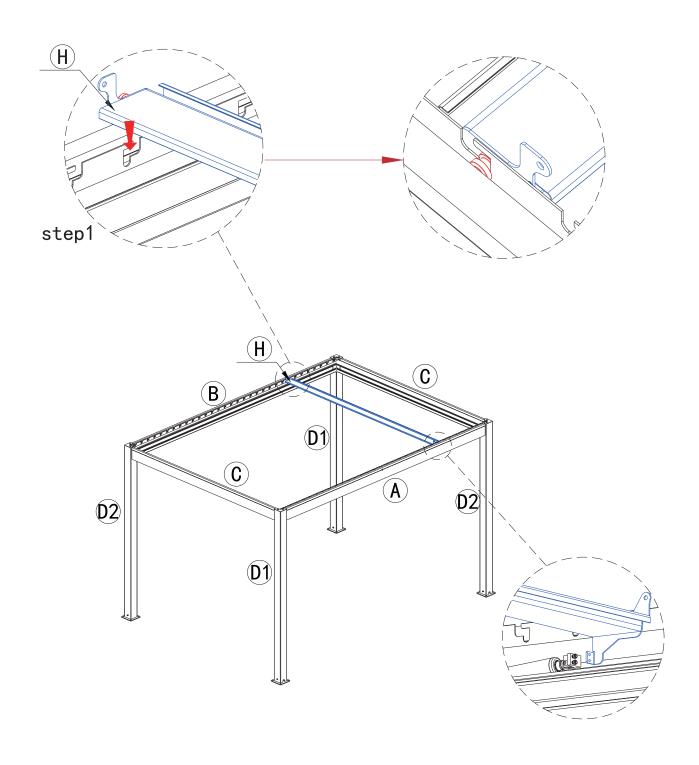



1.Place centre louver  $\fbox{I}$  in the middle slot on the beam  $\fbox{A}$  and  $\fbox{B}$ . Using  $\fbox{16}$  X2, secure the louver in place .

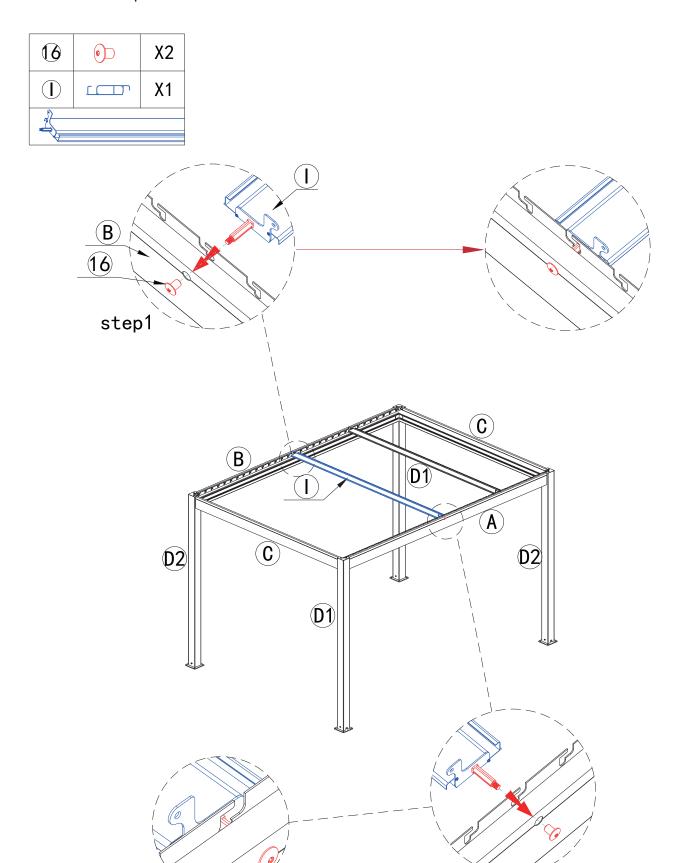

1. Fit all common louvers G X21 for 300x300cm and G X30 for both 300x400 into the remaining slots in the beams.



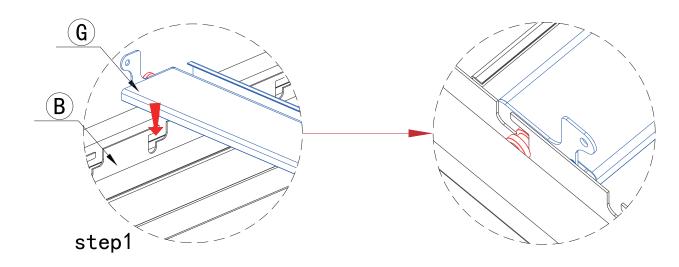

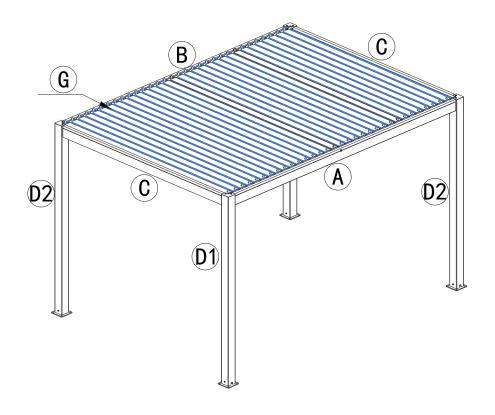


1.Fix(J)X4 (Flat shaped aluminum profile)


One of each other of slats is required.


\*Use bolt 4 X46, plastic spacer 5 X46, and nut 6 X 46 to tighten.(300X300cm)

\*Use bolt 4 X64, plastic spacer 5 X64, and nut 6 X 64 to tighten.(300X400cm)

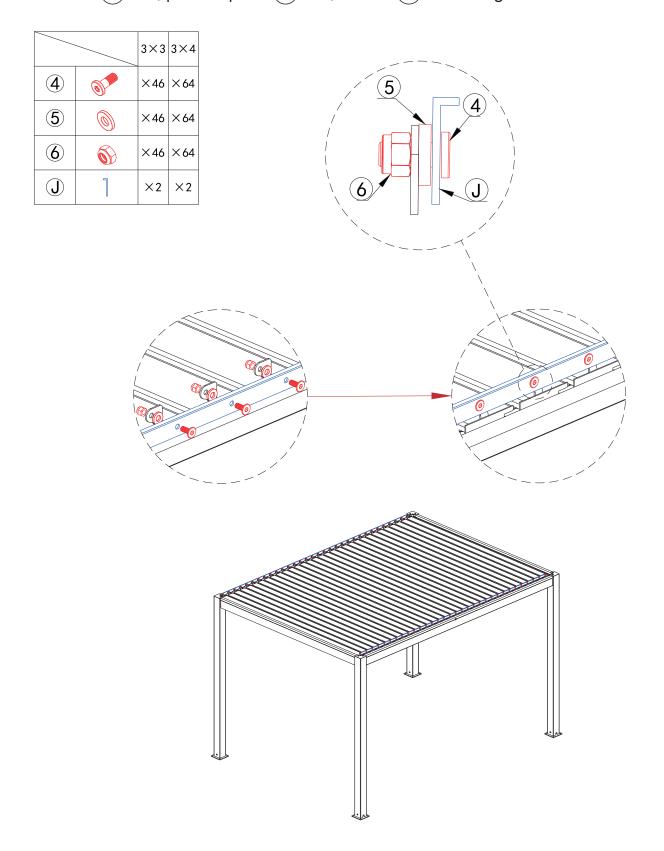

1.Using the screws from the motors sideways . Align the connector of  $\widehat{\mbox{\sc 15}}$  with the  $\widehat{\mbox{\sc H}}$  driving Side panels.

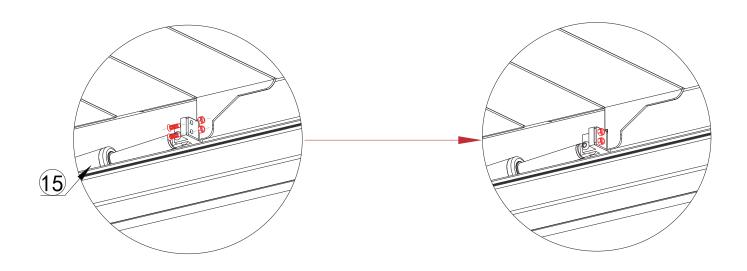

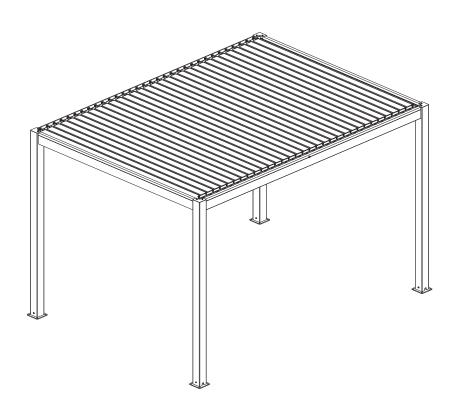

### Operation Manual for PM02\D Remote Control

#### 1. Function and Features


①Up button: Open motor

②Stop button: stop motor

3Down button: close motor

**(4)** Light control button: open the light


⑤Light control button: close the light

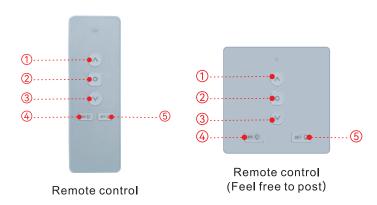

#### 2. Parameters

Product Name	Remote control with light control	Product Name	Remote control with light control (Feel free to post)
Receive/transmit Frequency	868.35MHz	Receive/transmit Frequency	868.35MHz
Working Temperature	−20°C~ + 85°C	Working Temperature	-20°C~ + 85°C
Receive Sensitivity	-110dBm	Receive Sensitivity	-110dBm
Number of Emitters Allowed	≤ 8pcs	Number of Emitters Allowed	≤ 8pcs

#### 3. Instructions



Note: Only the remote control that has entered the learning code state is supported to wake up to learn the code. After waking up, changing other remote controls cannot learn the code. (Use this method when you can't find the learned code remote control)



Open the back cover of the remote control Press the "U2" button on the back of the remote control for 7 seconds

When the motor makes a sound

Press the "Stop" button on the remote control for 5 seconds, the sound of the motor ends and the learning code is successfully

#### B. Deleting code steps



Open the back cover of the remote control Press the "U2" button on the back of the remote control for 7 seconds

Press the "Up" button on the remote control for 1 seconds, the motor rang

Press the "Down" button on the remote control for 5 seconds, the sound of the motor ends and the deleting code is successfully

#### WARNING: Ensure louvers are open during periods of mild to strong winds.

### **Dismounting**

If you want to disassemble the Pergola, please follow the following process.

#### Attention! At least two people are needed for this step.

- Keep the Pergola louvers open before you begin with dismounting. Bind the Louvers of the Pergola together to avoid unintended unfolding, This might cause damage and injury. You can use the protection band that was fixed on the Pergola when purchasing it.
- Follow the mounting instructions in reversed order to dismount the Pergola.
- Make sure that drilling holes in the wall will be sealed professional.
- Attention! Safety hints and instructions have to be followed for dismounting as well.

### Storage

When you do not want to use the Pergola for a longer period of time it is recommended to take the Pergola out of the brackets and store it.

- Make sure that the frame is dry completely before storing.
- ♦ Store the Pergola at a dry and safe place that is not reachable for children.

### **Disposal**

Do not dispose this Pergola with other household wastes. To prevent possible harm to the environment or human health from uncontrolled waste disposal, recycle it responsibly to promote the sustainable reuse of material resources. To return your used device, please use the return and collection systems or contact the retailer where the product was purchased. They can take this product for environmental safe recycling, Dispose packing materials according to local guidelines.